


- |   |                         |
|---|-------------------------|
| 1. Roof Top Unit                                | 8. Bonding Adhesive     |
| 2. True Seal™ Term Bar Butyl Tape               | 9. Roof Deck            |
| 3. Term Bar                                     | 10. True Seal™ Caulking |
| 4. True Seal™ Fastener                          |                         |
| 5. True Seal™ Metal Membrane Plate and Fastener |                         |
| 6. Field Weld (Minimum 1.5")                    |                         |
| 7. Approved True Seal™ Insulation/Cover board   |                         |

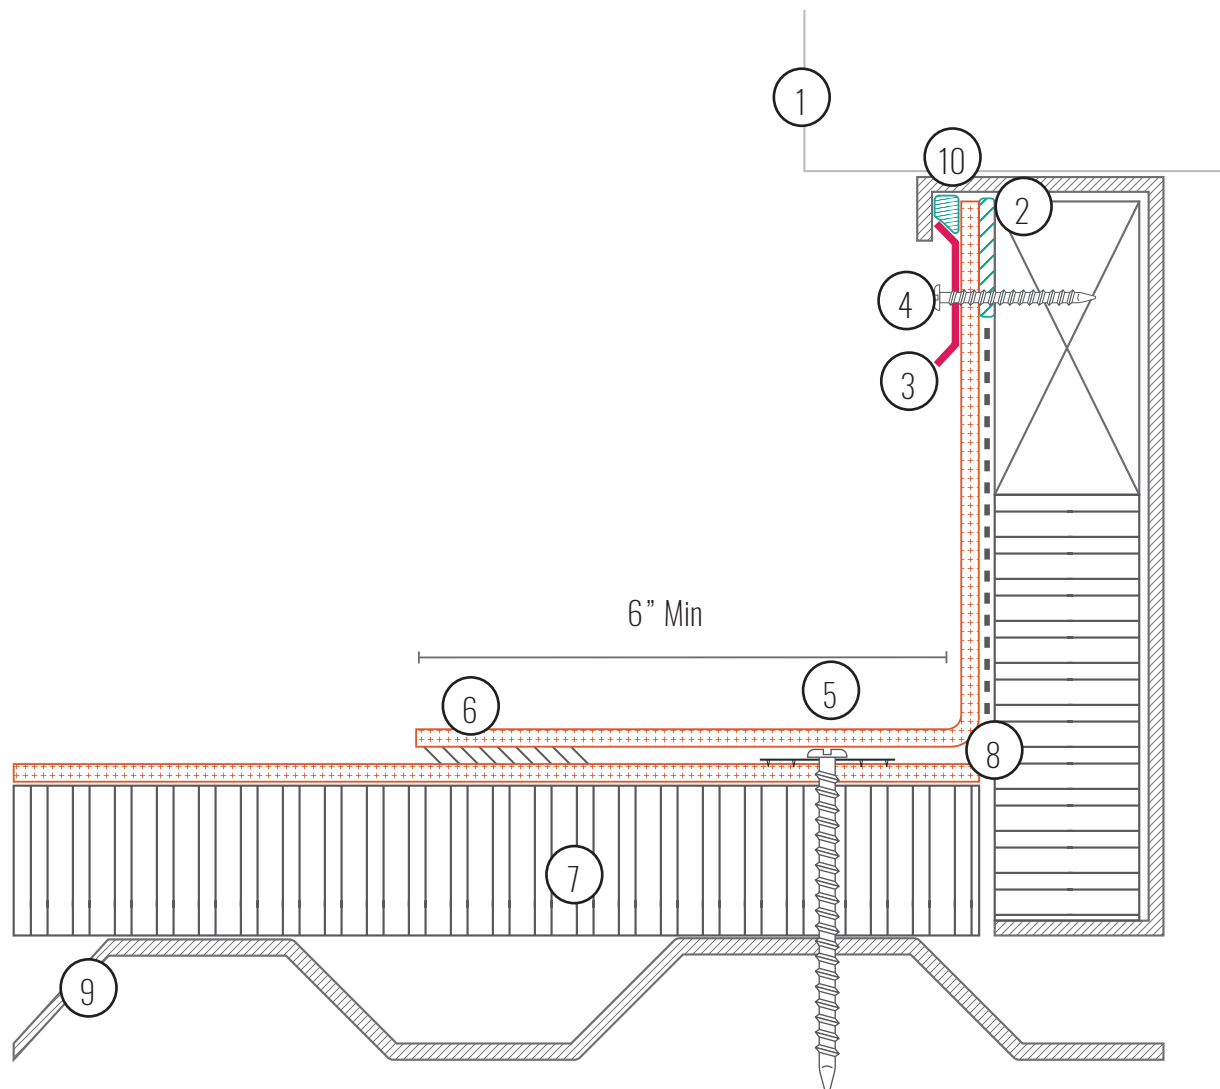

**Notes:**

- Please refer to the True Seal™ Specification Manual for approved insulations and cover boards
- Wall insulation (if applicable) must be fastened at a rate of 1 True Seal™ Fastener and Plate per 2 sqft
- True Seal™ flashing membrane must be in full adhesion with True Seal™ Low VOC @ 60ft<sup>2</sup>/gallon
- Unit must be perimeter secured with True Seal™ fasteners and True Seal™ metal membrane plates fastened at 12" on center.
- Apply True Seal™ Caulking inside curb lip before application of term bar.
- Term bar shall be secured as high on the curb as possible and allow fastening with True Seal™ fasteners.
- Term bar fastener must penetrate term bar butyl tape, membrane and term bar in alignment.
- Please contact the True Seal™ Technical Department for clarifications or questions at [tech@true-seal.com](mailto:tech@true-seal.com)