


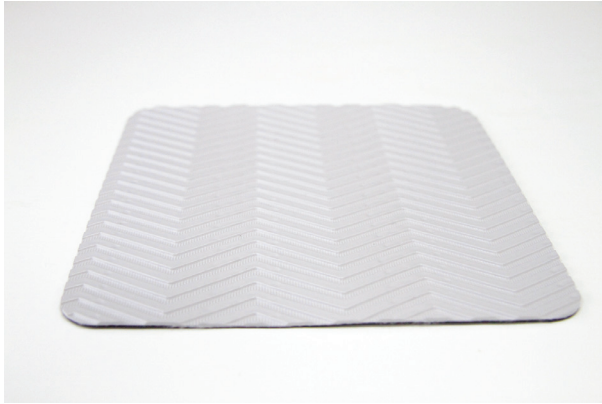

True Grip™ Walkpads are designed for use with PVC roofing systems as a walkway material to provide a layer of protection against damage from foot and maintenance traffic around rooftop equipment. True Seal recommends True Grip™ Walk Pads be used on roofs where regular foot traffic or maintenance occurs.

PACKAGING:

3 ft. x 60 ft. (180 sq. ft.)

FEATURES:

- Raised heavy duty chevron traction surfacing in gray color
- Available in a roll for easy layout and installation
- Heat welds directly to membrane

<i>Physical Properties</i>	<i>80 Mils (2 mm)</i>	<i>150 mils (3.8 mm)</i>
Thickness (nominal)	80 mils (2 mm)	150 mils (3.8 mm)
Roll Size	36 in x 60 ft	36 in x 60 ft
Coverage	180 ft ² / roll or 20 yd ² / roll	180 ft ² / roll or 20 yd ² / roll
Weight per Roll	99 lbs (45 kg)	129 lbs (58 kg)

<i>Material Property</i>	<i>Test Method</i>	<i>Standard</i>	<i>Metric</i>
Tensile Strength, Grab (Warp / Fill)	D751A	200 / 200 lbs	890 / 890 N
Tear Strength, Tongue (Warp / Fill) Size	D751B	45 / 45 lbs	200 / 200 N
Dimensional Stability (1 hr / 212°F)	D1204	+ / - 1%	
Ply Adhesion	D751 (mod)	14 lbs / 2 in	62 N / 5 cm
Screwdriver Puncture	D751	50 lbs	222 N
Abrasion Resistance (H18 / 1 kg)	D3884	10,000 cycles	
Coefficient of Friction (typical) (Dry / Wet)	C1028	1.0 Unit / 1.3 Units	
Low Temp	D2136	-40°F	-40°C
High Temp, Continuous Use	D1204	212°F	100°C
Certified slip resistance	ASTM 1677	PASS	