


SKYLIGHT / ROOF HATCH FLASHING

- | | |
|---|---|
| <ol style="list-style-type: none"> 1. Skylight/Hatch 2. Curb 3. Skylight/Hatch Metal Frame 4. True Seal™ Flashing Membrane 5. True Seal™ Fastener and True Seal™ Metal Membrane Plate 6. True Seal™ Field Seam (minimum 1.5") | <ol style="list-style-type: none"> 7. Roof Deck 8. Approved True Seal™ Insulation and/or Cover Board 9. True Seal™ Approved Bonding Adhesive |
|---|---|

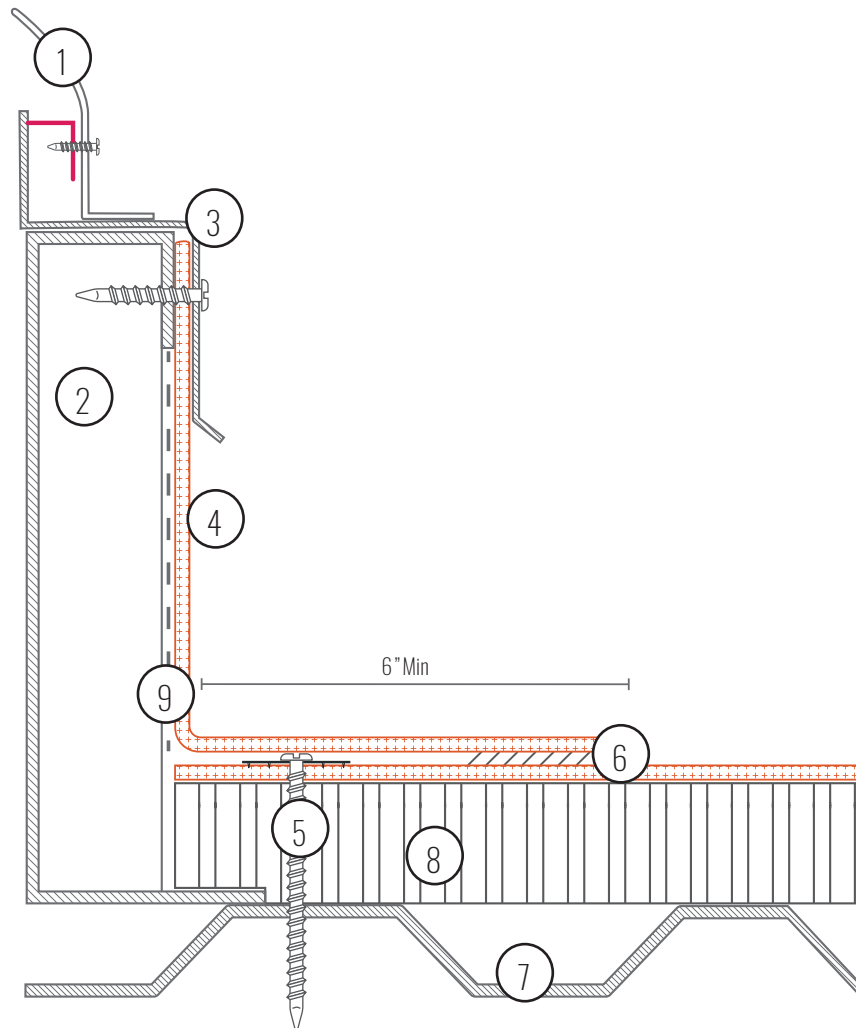

Notes:

- Please refer to the True Seal™ Specification Manual for approved insulations and cover boards
- Curb insulation (if present) must be fastened at a rate of 1 fasteners and plates per 2 sqft .
- True Seal™ flashing membrane must be in full adhesion with True Seal™ Low VOC @ 60ft²/gallon
- Fastener securing the metal frame must have a metal gromet or True Seal™ term bar butyl tape must be installed directly behind where the fastener penetrates the frame.
- Perimeter securement must be provided around the curb base at a rate of 1 fasteners and plate per foot.
- Please contact the True Seal™ Technical Department for clarifications or questions at tech@true-seal.com