


TERMINATION BAR WALL FLASHING

1. True Seal™ Caulking
2. True Seal™ Membrane (Flashing)
3. True Seal™ Termination Bar
4. True Seal™ Fastener
5. True Seal™ Term Bar Butyl Tape
6. True Seal™ Bonding Adhesive

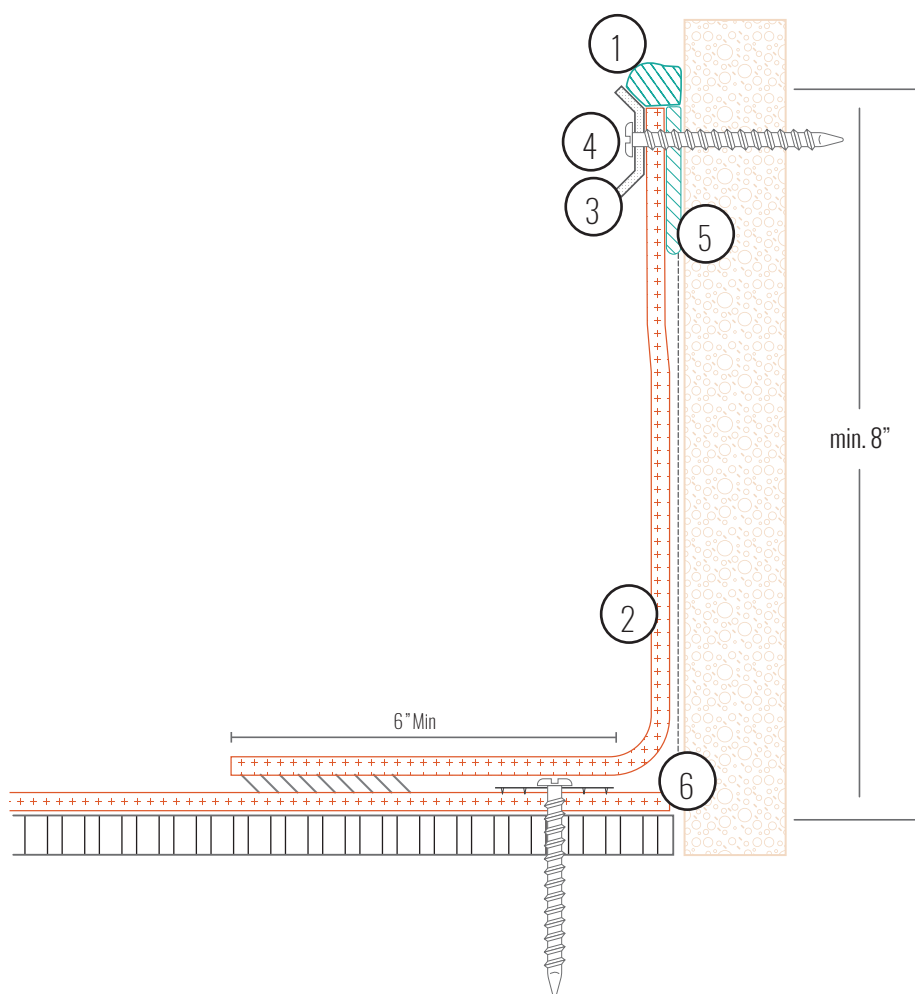

Notes:

- Please refer to True Seal™ Specification manual for approved substrates.
- Termination bar must be secured at 6" on center
- Care must be taken with placement of the termination bar to ensure that the fastener penetrates the term bar butyl tape.
- Typical completed coverage rate for True Seal™ Low VOC @ 60ft²/gallon
- Term bar butyl tape should not project above the term bar.
- True Seal™ bead should fill upper lip of termination bar 100% with concave profile.
- Please contact the True Seal™ Technical Department for clarifications or questions at tech@true-seal.com