


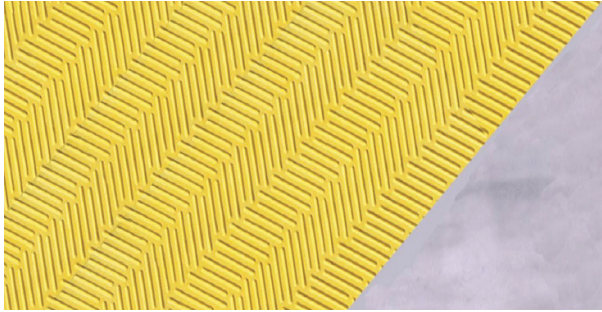

True Trac™ is made with PVC and can be welded directly to True Seal™ membrane. Raised herringbone surfacing in yellow color to help with traction and visibility. Ideal for roof hatches, ladders and access points to the roof

PACKAGING:

3 ft. x 50 ft. (150 sq. ft.)

Physical Properties	HERRINGBONE PATTERN WALKWAY ROLLS
Thickness (nominal) ASTM D412	5/32" ± 0.010" (4.0 mm ± 0.025 mm)
Tear Resistance ASTM D624	200 lbf/in (35.0 kN/m)
Elongation ASTM D412	200%
Dimensional Stability ASTM D1204 (2hr @ 158 °F/70 °C)	.25% (max change)
Accelerated Weathering ASTM G155	Pass @ 5,000 hrs
Ramp Test (Germany) DIN 51130 R10	Certified
Fire Test (Europe) EN 13501 E	Certified
Pendulum Test (UK) BS 7976-2 104/40.2	Certified
Color	Yellow
Back	Smooth
Size (W x L)	30" X 50' (76.2 cm x 15.2 m)
Weight	125lbs (56.7 kg)
Item ID #s	Yellow: #67-6717-25
Dimensional Stability ASTM D1204 (2hr @ 158 °F/70 °C)	.25% (max change)
Dimensional Stability ASTM D1204 (2hr @ 158 °F/70 °C)	.25% (max change)